(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 29 December 2004 (29.12.2004)

PCT

(10) International Publication Number WO 2004/113126 A1

(51) International Patent Classification7: 1/076, 1/066, F16D 7/02, 43/20

B60R 1/074,

(21) International Application Number:

PCT/US2004/019425

17 June 2004 (17.06.2004)

(25) Filing Language:

English

(26) Publication Language:

(22) International Filing Date:

English

(30) Priority Data: 60/320,292


19 June 2003 (19.06.2003)

(71) Applicant (for all designated States except US): MAGNA DONNELLY MIRRORS NORTH AMERICA, L.L.C. [US/US]; 4720 - 44th Street, S.E., Kentwood, Michigan 49512 (US).

- (72) Inventor; and
- (75) Inventor/Applicant (for US only): PETERSON, Kenneth C. [US/US]; 5714 N. Division, Comstock Park, Michigan 49321 (US).
- (74) Agent: WILLIAMS, G. Thomas; 171 Monroe Avenue, N.W., Suite 600, Grand Rapids, Michigan 49503 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: VEHICLE MIRROR WITH POWERED EXTENSION INCORPORATING SLIP CLUTCH

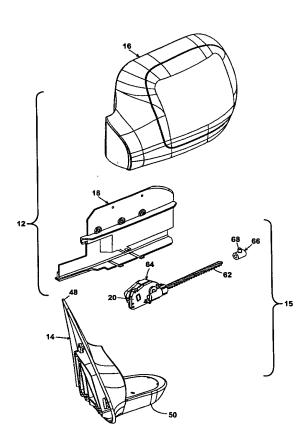

(57) Abstract: The invention relates to an exterior vehicle mirror having a mirror assembly mounted to a vehicle. A drive assembly comprises a drive screw coupled to a motor and a drive nut threadably mounted on the drive screw. The rotation of the drive screw by the motor causes the drive nut to traverse the drive screw. As the drive nut traverses the drive screw, it causes the extension and retraction of the mirror assembly. A slip clutch is interposed between the motor and the drive screw to enable the motor to continue to operate without damage if the mirror assembly reaches full extension or retraction.

WO 2004/113126 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.